

**FEATURES**

- Isolated base
- Highly efficient


**TYPICAL APPLICATIONS**

- DC shunt motor
- DC clutch
- Solenoid
- DC braker




CURRENT RANGES (Amp.)	PICK-UP CURRENT (+/-5%)	DROP-OUT CURRENT (Less Than)	SIZE (mm)
0.1 to 0.5	80 mA	50 mA	95 X 35
0.2 to 0.7	180 mA	100 mA	95 X 35
0.7 to 1	600 mA	350 mA	95 X 35
1 to 2	850 mA	500 mA	95 X 35
2 to 4	1.8 mA	1.0 mA	95 X 35
4 to 6	3.6 mA	2.0 mA	95 X 35
6 to 10	5.0 mA	2.5 mA	95 X 35

**CIRCUIT DIAGRAM**

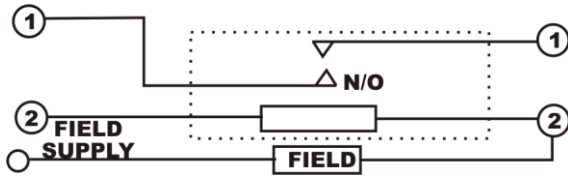

**PACKAGE OUTLINE**

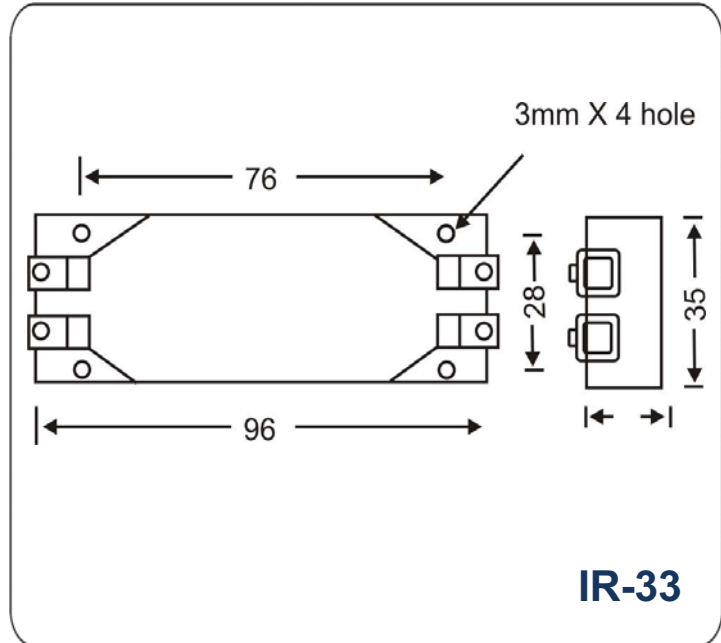

All dimensions are in mm.

**Insel Rectifiers (India) Pvt. Ltd.**

(An ISO 9001:2015, ISO 14001:2015 Certified Company)

Plot No 151, Udyog Kendra, Extn.-II, Ecotech-III, Greater Noida-201306

Toll Free No.: 1800 3070 9989, Fax : 011-27491404

E-mail : [insel@rectifierindia.com](mailto:insel@rectifierindia.com), [sales@rectifierindia.com](mailto:sales@rectifierindia.com)