

**FEATURES**

- Heat transfer through ceramic.
- Hard solder joints for high reliability
- Isolated base mounting

**TYPICAL APPLICATIONS**

- Non-controllable rectifiers for AC-AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motor

**TECHNICAL DATA**



DEVICE TYPE	$V_{RRM}$ (V)	$V_{RSM}$ (V)
<b>IRKD125/12</b>	<b>1200</b>	<b>1300</b>
<b>IRKD125/16</b>	<b>1600</b>	<b>1700</b>
<b>IRKD125/20</b>	<b>2000</b>	<b>2100</b>
<b>IRKD125/22</b>	<b>2200</b>	<b>2300</b>

SYMBOL	CONDITIONS	VALUES
$I_{FAV}$	Sin. 180; $T_{case} = 85\text{ }^{\circ}\text{C}$	125 amp.
$I_{FSM}$ $I^2t$	$T_{vj}=25\text{ }^{\circ}\text{C}$ ; 10 ms $T_{vj}=25\text{ }^{\circ}\text{C}$	2500 amp. $31250\text{ A}^2\text{s}$
$I_{RRM}$	$T_{vj}=25\text{ }^{\circ}\text{C}$ $T_{vj}=125\text{ }^{\circ}\text{C}$	1 mA 5 mA
$V_F$ $V_0$ $R_0$	$T_{vj}=25\text{ }^{\circ}\text{C}$ ( $I_F = 300\text{ Amp.}$ ); max $T_{vj}=125\text{ }^{\circ}\text{C}$ $T_{vj}=125\text{ }^{\circ}\text{C}$	1.35 V 0.85 V 1.3m $\Omega$
$R_{th(j-c)}$ $R_{th(c-h)}$ $T_{vj}$ $T_{stg}$	per diode/per module per diode/per module	0.35/0.175 $^{\circ}\text{C/W}$ 0.20/0.10 $^{\circ}\text{C/W}$ -40 to +125 $^{\circ}\text{C}$ -40 to +125 $^{\circ}\text{C}$
Mounting torque		5 Nm/Per bolt
Weight	Approx.	95 gms
$V_{(isol)}$	Ac 50 Hz rms 1 min	3000 volts
Package Outline		IR-1

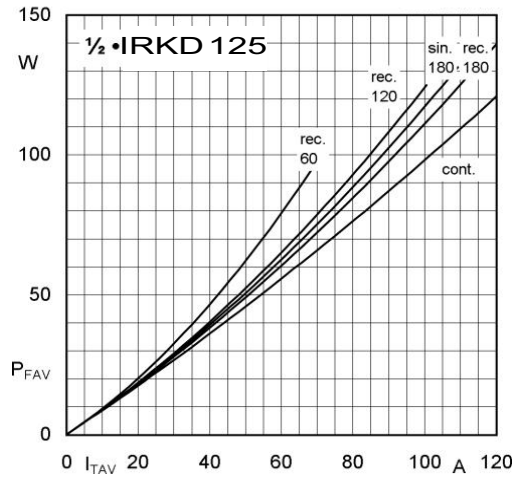


Fig. 11L Power dissipation per diode vs. forward current

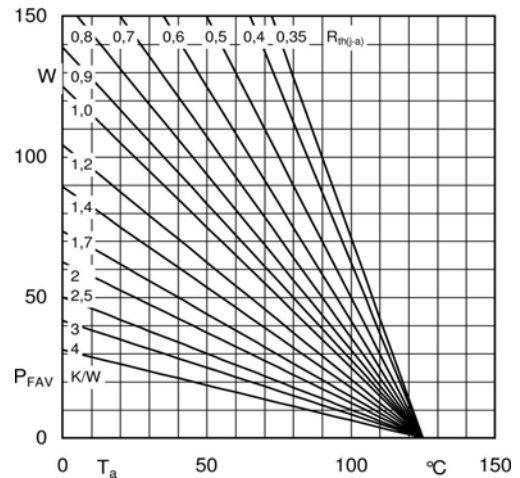


Fig. 11R Power dissipation per diode vs. ambient temperature

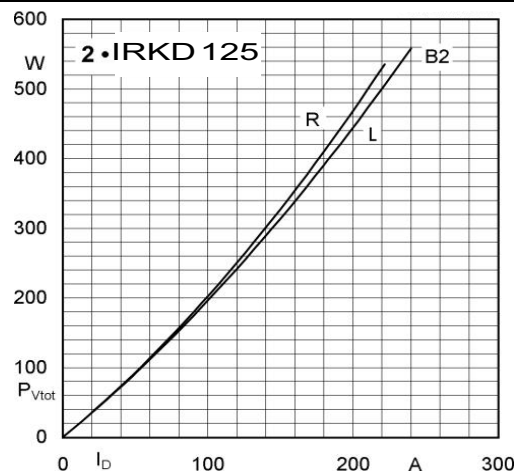


Fig. 12L Power dissipation of two modules vs. direct current

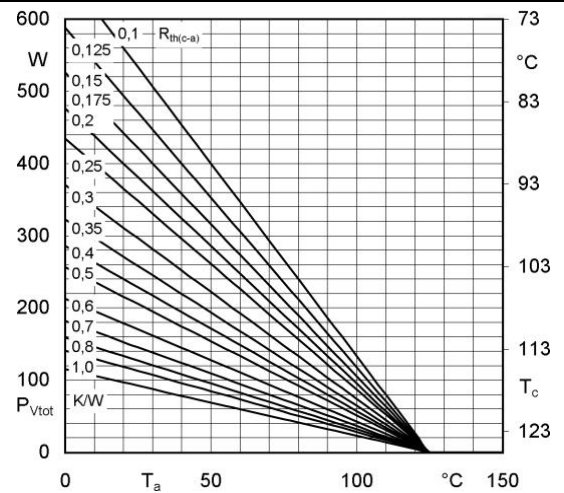


Fig. 12R Power dissipation of two modules vs case temperature

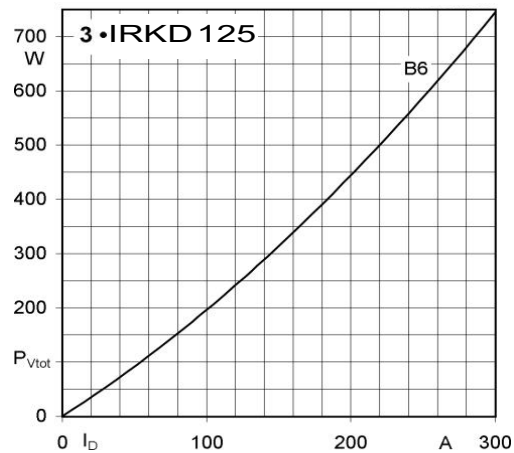


Fig. 13L Power dissipation of three modules vs. direct current

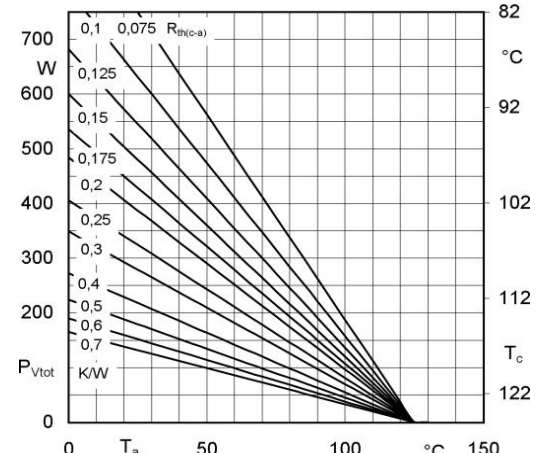


Fig. 13R Power dissipation of three modules vs. case temperature

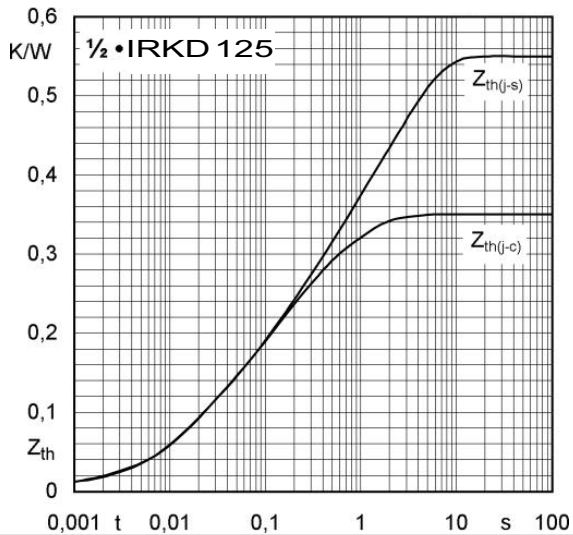


Fig. 14 Transient thermal impedance vs. time

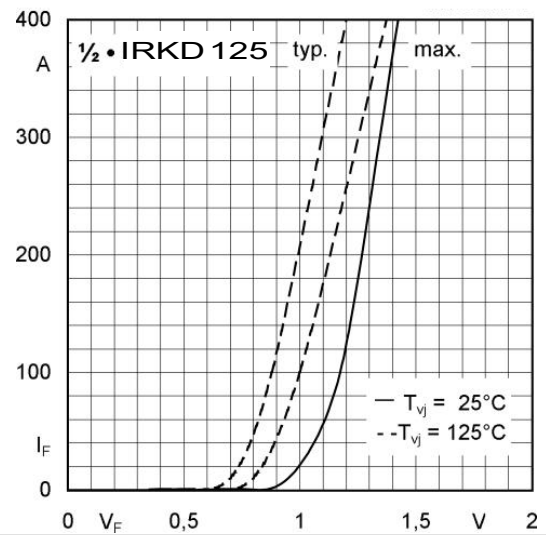


Fig. 15 Forward characteristics


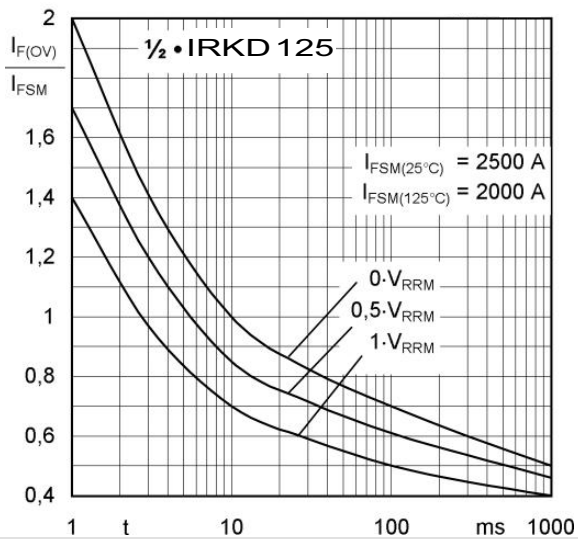


Fig. 16 Surge overload current vs. time


## CIRCUIT DIAGRAM

IRKD 125

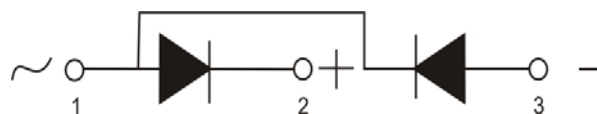

## PACKAGE OUTLINE

IRKD 125

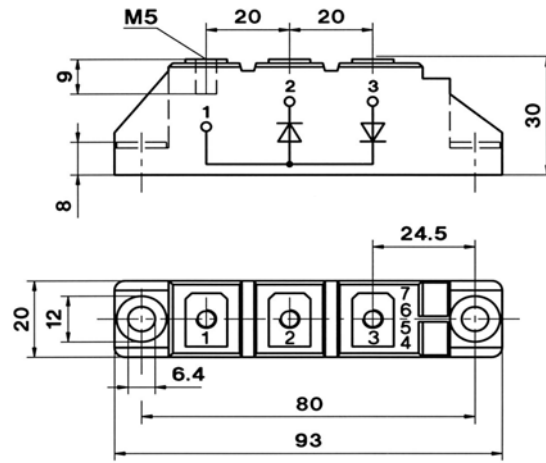

IR- 1

All dimensions are in mm.

## Insel Rectifiers (India) Pvt. Ltd.

(An ISO 9001:2015, ISO 14001:2015 Certified Company)

Plot No 151, Udyog Kendra, Extn.-II, Ecotech-III, Greater Noida-201306

Toll Free No.: 1800 3070 9989, Fax : 011-27491404

E-mail : [insel@rectifierindia.com](mailto:insel@rectifierindia.com), [sales@rectifierindia.com](mailto:sales@rectifierindia.com)